

# Shanklin® Models T-9

## Shrink Tunnel

All of the Excellent Durability and Performance of Our Shanklin T-7 Series...in a Larger Size




- **Expanded Capacity**—Produces superior shrinks on large and high profile packages.
- **Versatile**—Designed especially for sleeve-wrapped packages and large L-Sealed packages.
- **Rugged**—Built to last; stainless steel mesh conveyor belt standard.
- **Multiple Options**—Two large capacity models available in varying tunnel heights and widths to best meet your unique shrinking needs.

**Outstanding Shanklin Large Capacity Shrink Tunnels have been designed for your larger needs. Contact your Shanklin distributor to find out more.**

## Superior Shrinks...in a Big Way!

Shanklin T-8/T-9 Large Capacity Shrink Tunnels are specially designed for packages too large or wide to fit through our Shanklin T-7 Series tunnels. The T-9 is particularly effective for low-profile, wide product and/or bulky product. With two models and a variety of capacity dimensions to choose from, there's a Shanklin T-8 or T-9 perfect for your application.

### T-9 Plan View

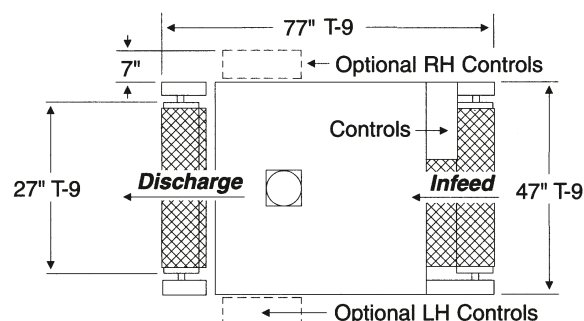

### The Perfect Partner

Partner your T-9 Shanklin Shrink Tunnel with a Shanklin A-28A Automatic L-Sealer for a complete, dependable, quality shrink packaging solution.



## Shanklin Model T-9 Specifications

	Model T-9
<b>Tunnel passage</b>	6" high x 36" wide 14" high or 20" high available
<b>Conveyor length</b>	77" long
<b>Tunnel height above conveyor</b>	(6" opening) 38"
<b>Conveyor height</b>	28" minimum, 40" maximum (Adjustable telescoping legs)
<b>Conveyor speed and type</b>	Variable from 0 to 74 ft./min., mesh belt standard, live and dead roller available
<b>Blower motor</b>	1 1/2 hp, 3 phase
<b>Heaters</b>	Multiple finstrip (encased element) heaters
<b>Power</b>	(6" opening): 230V, 3 phase, 63 amps, 22 KVA (460V, 3 phase, 32 amps, 22 KVA available)  (14" and 20" opening): 230V, 3 phase, 88 amps, 31 KVA (460V, 3 phase, 45 amps, 31 KVA available)
<b>Controls</b>	<ul style="list-style-type: none"> <li>• Precision-indicating controller calibrated 50° to 500° F</li> <li>• Main power fused disconnect</li> <li>• Conveyor variable speed control</li> <li>• Tunnel control switch</li> <li>• Variable air velocity control</li> <li>• Conveyor control switch</li> <li>• Volume control for bottom air</li> </ul>
<b>Safety features</b>	<ul style="list-style-type: none"> <li>• Motors overload protected</li> <li>• High temperature limit switch</li> <li>• Torque limiting clutch on conveyor</li> </ul>
<b>Accessories</b>	<ul style="list-style-type: none"> <li>• Cascade plates for side air</li> <li>• Composite link conveyor belt</li> <li>• Live or dead roller conveyor</li> <li>• Chamber height extensions</li> <li>• "Poly kit" for use with LDPE</li> </ul>

Specifications on all machines subject to change without notice. Some photos may show accessories not part of the basic machine.

**Sealed Air®**

台灣希悅爾股份有限公司  
桃園市蘆竹區長安路二段102號  
Tel:03-2165030

www.sealedair.com