

Our Products Protect Your Products®



Performance Shrink Films

MPD High Speed Shrink Films

CorTuff® High-Abuse Film

- Strongest impact strength available – ideal for heavy, odd-shaped products
- Can replace bulkier packaging materials
- Can be used as primary shipping media



D-940 Soft Shrink Film

- Perfect for softer items like printed paper goods
- Super low shrink force prevents distortion
- Runs on a wide variety of equipment



Consultative Services

- Package concept development
- Film selection assistance
- Packaging line audits and economic analysis



LD-935 Multi-Purpose Film

- Great for uniform-sized, lightweight products
- Longer rolls mean fewer changeovers, less downtime
- Superior optics for unsurpassed shelf appeal

D-955 Multi-Purpose Film

- Most versatile film on the market
- Perfect for multi-packs and irregularly-shaped items
- Superior abuse resistance

Equipment Systems Support

- Feasibility studies of proposed equipment
- Custom-built shrink packaging systems
- Equipment installation, training and ongoing technical support

*The
Fastest
Way to
the
Perfect
Fit*



Cryovac North America
PO Box 464
100 Rogers Bridge Road, Bldg. A
Duncan, South Carolina 29334-0464
Toll Free: 866-PS-FILMS (866-773-4567)
Fax: 864-433-2019
cryovac.mkt@sealedair.com
www.shrinkfilms.com

Distributed by:

Sealed Air Corporation

High Speed Shrink Films

Literally no other films look as good on your package as Cryovac® MPD high-speed films. MPD-2055 and MPD-2100 are the fastest, flashiest, shiniest films around designed to help you market your products with both merchandising appeal and protection advantages.

It's All in the Package

■ **MPD-2055, A Mirror Image.** The unparalleled clarity of MPD-2055 allows your product to be the hero. Ideal for those items where shoppers' first impressions are critical. It is printable so you may be able to eliminate the need for secondary packaging.

■ **MPD-2100, A Secure Package.** Perfect for products requiring the strongest, most reliable lap seal available. MPD- 2100's electrostatic seal allows you to reduce the film width of the overlap while improving overall operations, which means less down time and reduced reject rates at pack-off.

■ **Speed Matters.** Higher modulus allows clean tracking on high-speed equipment and both films are designed to run at speeds of up to 200 packages per minute.

■ **The Perfect Fit.** With wide sealing ranges and excellent shrink properties, both films produce a virtually distortion-free, contour-hugging package even under extreme hot or cold temperatures. These "all weather" films remain pliable even at minus 40 degrees Fahrenheit. Improved film to film slip characteristics also mean improved pack-off. And MPD won't stick to polyethylene bundling films.

■ **No Fumes.** The polyolefin construction of MPD means the films seal cleanly and consistently without disagreeable fumes or corrosion buildup.

Film Highlights


■ **Material.** Multiple layers of co-extruded material, each contributing a specific performance characteristic, combine to form a versatile film with superior overall properties.

■ **Appearance.** Superior clarity, gloss and sheen. Perfectly tight-fitting packages that "jump" off the shelves.

■ **Toughness.** Resistant to scuffs and tears. Durability and tensile strength provide product protection during distribution and in-store handling.

■ **Machinability.** Excellent performance on all types of equipment from manuals to high-speed automatics.

The Clear Advantage

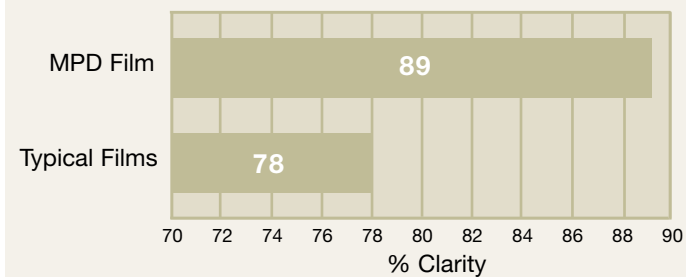

Properties

MPD-2055		ASTM Test Method	Typical Values			
Gauge			50	60	75	100
Yield (sq. in. per pound)			60,700	55,000	40,500	30,400
Haze (%)		D 1003-95	2.0	2.3	2.3	2.6
Gloss (%)		D 2457-90	89	89	89	89
Clarity (%)		D 1746-92	89	89	89	89
Instrumented Impact Strength (lbs)		D 3763-95a	12.1	12.8	15.5	20.0
Coefficient of Friction (film-to-film, kinetic)		D 1894-95	0.30	0.30	0.31	0.30
Water Vapor Transmission Rate (gms/100sq. in.24hrs.); 100% RH,100° F		F 1249-90	1.5	1.3	1.0	0.7
Oxygen Transmission Rate (cc/m²/24hrs. @ 73° F, 1atm)		D 3985-95	7,877	7,500	6,315	5,303
Tear Propagation (gms)	LD*		6.2	7.5	9.9	13.2
	TD**	D 1938	11.2	8.3	11.3	14.8
Elongation at Break (%)	LD*		100	100	100	100
	TD**	D 882-95	110	110	110	110
Minimum Use Temperature			-40° F			
Maximum Storage Temperature			90° F			
			LD*		TD**	
Tensile Strength (psi)		D 882-95	16,500		17,500	
Modulus of Elasticity (psi @ 73° F)		D 882-95	110,000		110,000	
Free Shrink (%)		D 2732-83				

*Longitudinal Direction **Transverse Direction

This information represents our best judgement based on the work done, but the Company assumes no liability whatsoever in connection with the use of information or findings contained herein. MPD-2055 complies with the requirements of the Federal Food, Drug and Cosmetics Act, as amended, for the packaging of all foods, with the exception of high alcoholic, at temperatures of 65°C and below. MPD-2100 complies with the requirements of the Federal Food, Drug and Cosmetics Act, as amended, for the packaging of all foods, with the exception of high alcoholic, at temperatures of 65°C and below.

